


Find Your Solution

# SPS/D-M7500G

Series

**Direct drive  
Rotary hook type**

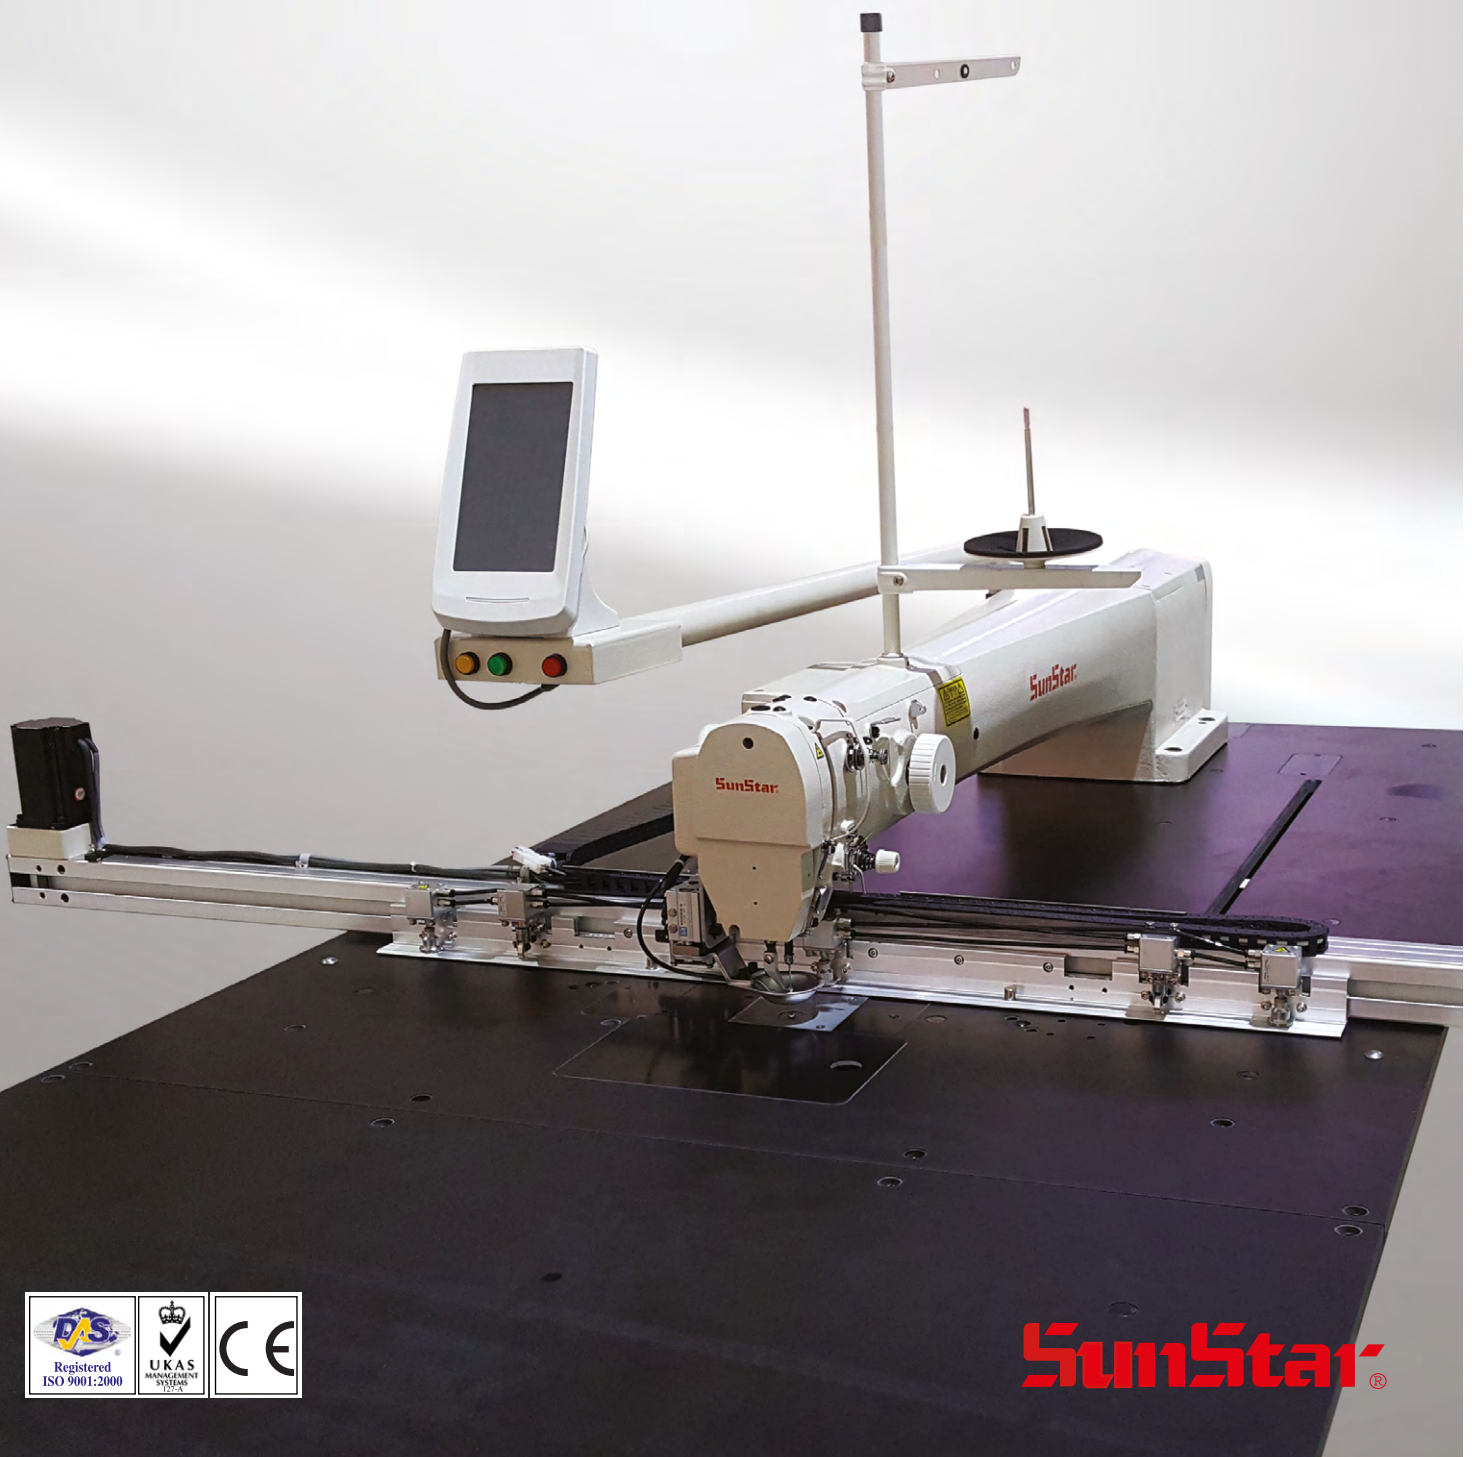

**SunStar®**



# SPS/D-M7500G Series

Direct drive Rotary hook type

SPS/D-M7500G-80/90 ■■■

<b>SPS</b>	/	<b>D</b>	-	<b>M7500</b>	<b>G</b>	<b>80/90</b>	-			
<i>SunStar Pattern System</i>								<i>Y Sewing Area</i>		1) K(Straight) 2) RK(360°Rotating) 3) LK(Laser Cutting) <b>Option</b>
<i>Generi Materlal</i>										

Specifications		
Sewing Area	D-M7500G 80 (X:1200mm / Y:800mm)	D-M7500G 90 (X:1200mm / Y:900mm)
Max sewing speed	3200rpm (stich length less than 3.5mm)	
Stitch length [mm]	0.1~12.7mm	
Hook	Standard rotary hook / Double-capacity rotary hook(option)	
Needle	DP X 5(#7~#10)	
Lift of the presser foot	10mm	
Lift of the auxiliary presser foot	10mm	
Lift of the intermediate presser	17mm	
Intermediate presser stroke	4mm(Standard) (0~10mm)	
Number of input patterns	Max, 999 patterns(Max 50,000 stitches/pattern)	
Number of jig	Sensor: 256 jig / Barcode: 999 jig	
Voltage	220V	
Motor	550W AC Servo motor	
Air pressure	0.5~0.55 Mpa	

\* Specifications and appearance of products are subject to change without notice for the performance improvement.

## Features

Cutting edge sewing technology is grafted on SPS/D-M7500G series, providing innovation features!



Fine-tuning of lubrication for hook

Fine-tuning of lubrication for hook is excellent for cutting oil consumption and working environment



Rail provides accuracy

Transferring system by gear, timing belt and rail provides accuracy and it is also convenient for making jig



Easy to maintain

Structure of trimming knife, thread cover and hook holder enables to replace them in front of machine and it is also easy to maintain

### SUNSTAR CO.,LTD

#39, Saebeol-ro, Bupyeong-gu, Incheon, Korea  
 Tel: 82-32-580-5600 / Fax: 82-32-584-3020  
[www.sunstar.co.kr](http://www.sunstar.co.kr) / [marketing@sunstar.co.kr](mailto:marketing@sunstar.co.kr)

### SUNSTAR CO.,LTD [SEOUL BRANCH]

SUNSTAR BLDG., 176-8, Jung-gu, Seoul, Korea  
 Tel: 82-2-2212-6566 / Fax: 82-2-2212-6599